




## 50VA – 5000VA SINGLE PHASE HORIZONTAL RANGE TRANSFORMERS

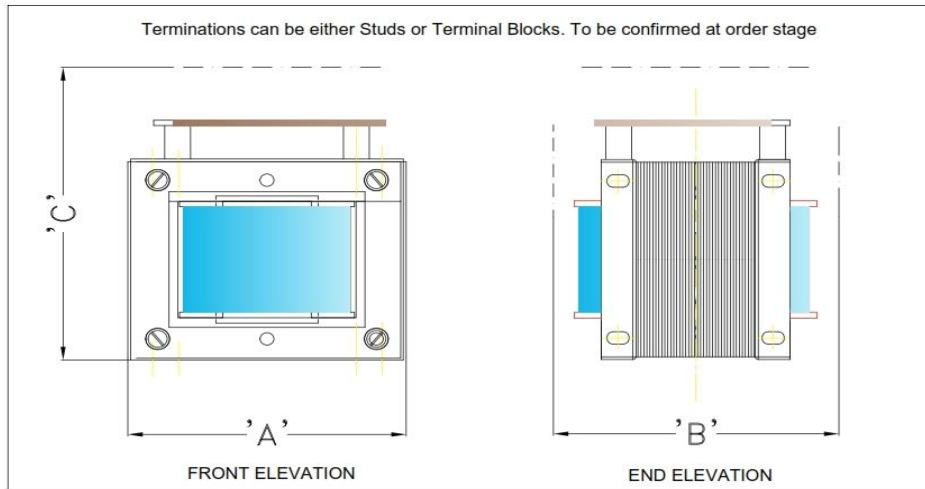

Ref	Rating	A	B	C	Weight	Case	Case Weight	Losses (Watts)
HFPS50	50VA	80	58	125	1.35	P0	1.1	15W
HFPS75	75VA	80	64	125	1.4	P0	1.1	20W
HFPS100	100VA	80	70	125	1.6	P0	1.1	20W
HFPS150	150VA	101	78	150	2.6	P2	1.1	25W
HFPS200	200VA	101	85	150	3	P2	1.1	30W
HFPS250	250VA	101	87	150	3.2	P2	1.1	35W
HFPS300	300VA	117	95	160	4.4	P2	2	40W
HFPS400	400VA	136	103	175	6	p2	2	50W
HFPS500	500VA	136	103	175	6	P2	2	50W
HFPS600	600VA	136	116	175	7.6	P2	2	60W
HFPS750	750VA	136	128	175	8.9	P2	2	70W
HFPS1000	1000VA	166	125	200	10	P3	3.8	75W
HFPS1250	1250VA	166	144	200	14	P3	3.8	90W
HFPS1500	1500VA	166	160	200	17	P3	3.8	110W
HFPS2000	2000VA	215	145	250	18	P4	3.8	110W
HFPS2500	2500VA	215	158	250	23	P4	3.8	125W
HFPS3000	3000VA	215	171	250	26	P5	6.2	160W
HFPS3500	3500VA	215	183	250	30	P5	6.5	165W
HFPS4000	4000VA	215	198	250	32	P5	6.2	185W
HFPS4500	4500VA	215	210	250	38	P5	6.2	200W
HFPS5000	5000VA	215	221	250	41	P5	6.2	200W

All Details are approximate only. Fixings can be given only after the order is placed.


See sheet 2 for photograph of typical Horizontal 1ph transformer.



Unit 6 Weston Works, Weston Lane, Tyseley, Birmingham B11 3RP.

Tel. 0121 764 5600 Fax. 0121 764 5551 e-mail sales@birminghamtransformers.co.uk

**Transformer with Terminal Blocks fitted on raised terminal panel.**

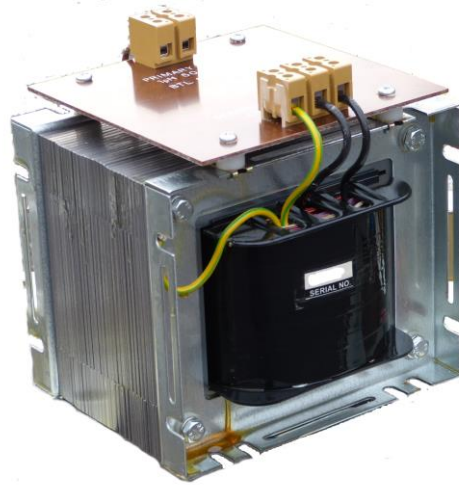

© Birmingham Transformers Ltd 2016